


Appearance Parameters:

Magic Stage Unit (Cabinet) Size: 500mm (width) *500mm (height) *73mm (thickness)

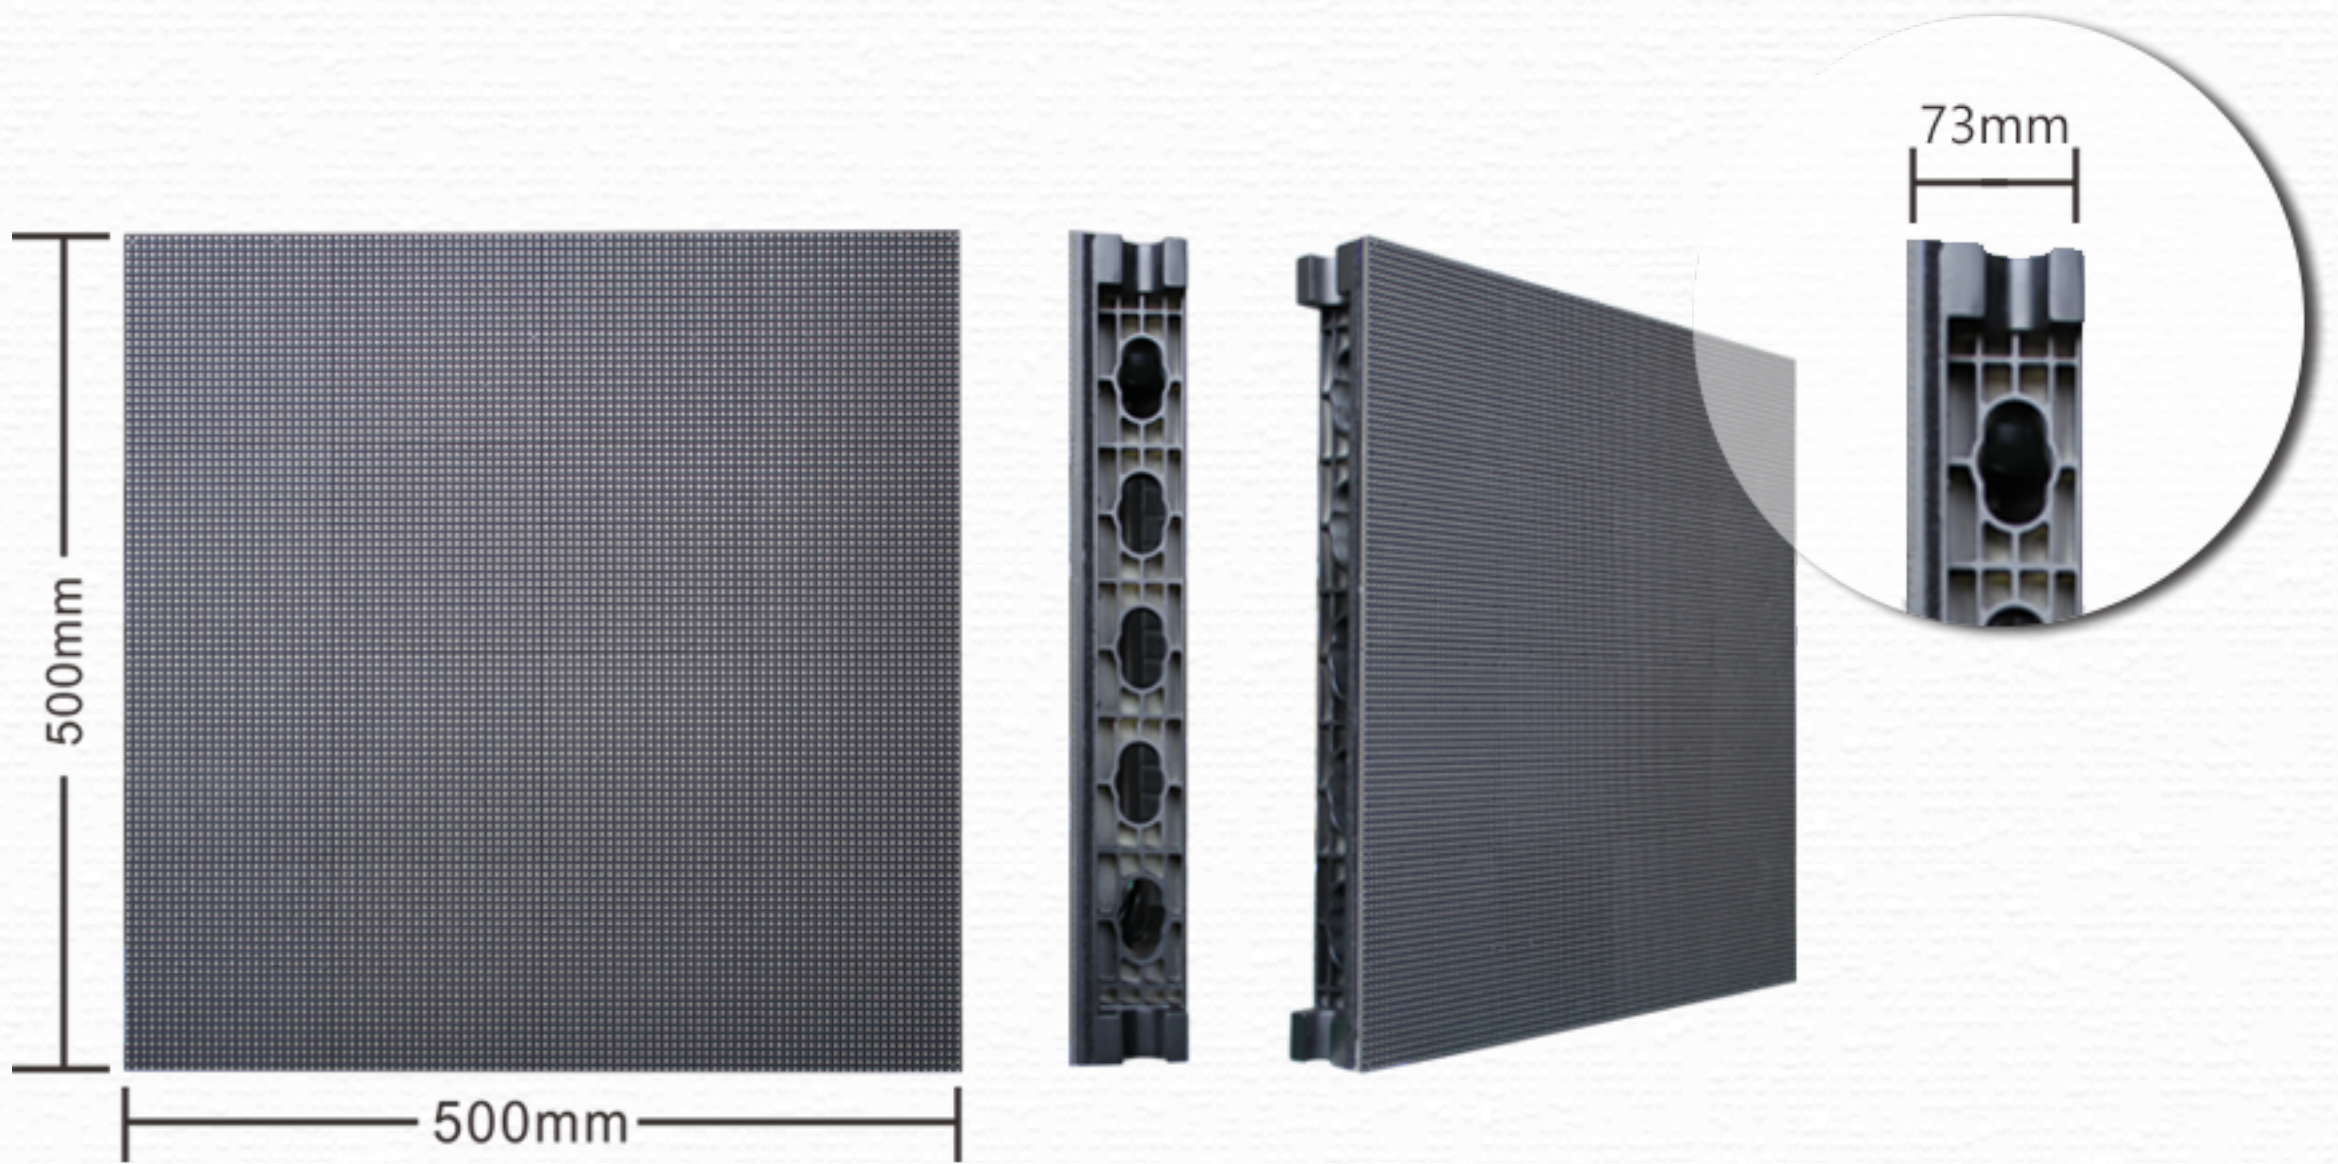

Basic Parameters:

Hot Model	MG5 P5.9	MG6 P3.125	MG6 P3.9	MG7 P4.8	MG7 P5.9
Operating Environment	indoor&outdoor	indoor	indoor	indoor&outdoor	indoor&outdoor
LED Encapsulation	2828	2020 (black)	2020 (black)	1818	2828
Pixel Pitch (mm)	5.9	3.125	3.9	4.8	5.9
Pixel Density (dot/m ²)	28224	102400	65536	43264	28224
Weight (kg/unit)	5.9	5.8	5.7	6.5	6.4
Unit Resolution (w*h)	84*84	160*160	128*128	104*104	84*84
IP Grade	Front IP65 Back IP54	IP50	IP50	Front IP65 Back IP54	Front IP65 Back IP54

Performance Parameters:

White Balance Brightness (cd/m²) : 1000/1200±10% (indoor) ; 6000±10% (outdoor)

Single LED Brightness / Chroma Calibration : YES / YES

Color Temperature (k) : 6500~10000 (Adjustable)

Pixel Center Distance Deviation : <3%

Brightness Uniformity : <97%

Color Uniformity : within ±0.003Cx, Cy

Frame Frequency (Hz) : 50 & 60

Refresh Frequency (Hz) : 1920 (Adjustable)

Using Parameters:

Life Span (h) : 100000

Working Voltage : AC100~240V (50~60Hz)

Horizontal / Vertical Viewing Angle (°) : 160/120

Working / Storage Temperature (°C) : -20~45 / -30~60

Working / Storage Humidity (RH) : 10%~90% / 10%~95% (No condensation)

Communication Mode : Cat 5

Curve Installation Degree: -15°~15°

Minimum Circle Diameter (m) : 3.8

HOT SPOTS

- About Us
- Popular products
- Exhibition activities
- Leave a comment

NEED HELP?

- Contact online-service
- Submit a service request
- For urgent service
- For on-door service

SELF-SERVICE

- How-to videos
- Screen shape ideas
- Knowledge Base
- Download

Contact

E-mail: yestech@yes-led.com
Tel: +86-(0)731-84539619
After-Sales Service: +86-(0)731-84530058
Add: YES TECH Optoelectronic Industrial Park, No.108
Qingzhuhu Road, Kaifu District, Changsha City, Hunan
Province, China



Links : [yesled.alibaba](#) | [yesled.facebook](#) | [yesled.youtube](#)

Hunan Yestech Optoelectronic Co., LTD



